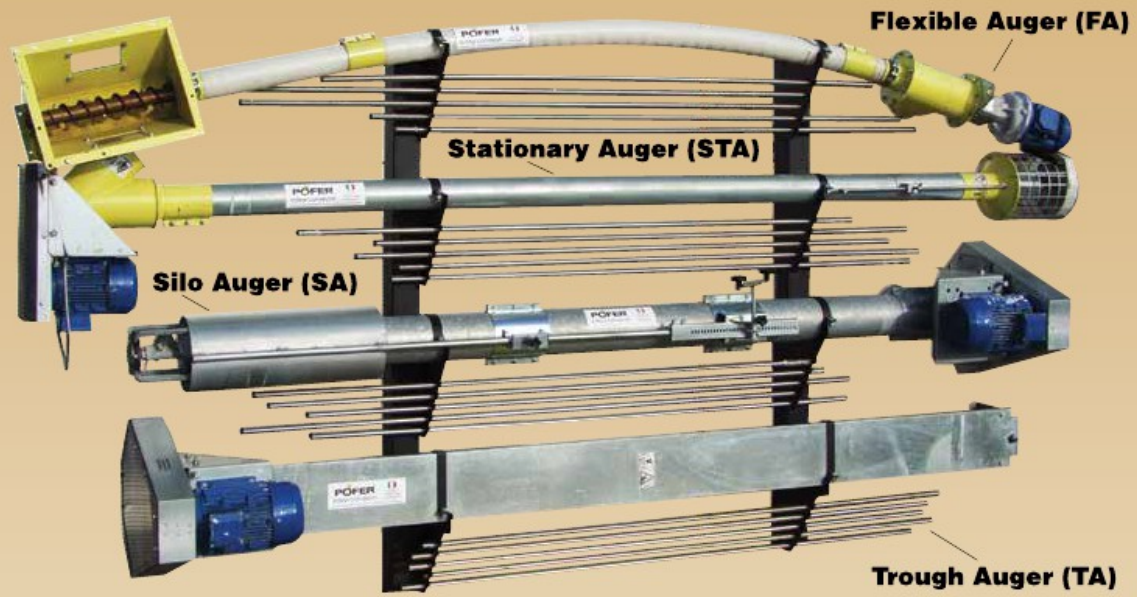


# FARMERS AUGERS CE

Technical Specifications

| FA - Flexible Auger | STA - Stationary Auger | SA - Silo Auger | TS - Trough Auger |
|---|---|---|---|
| • Available in diameters from 50 to 100mm.<br>• Outputs from 500kg to 3500kg.<br>• Flexible Augers are utilized when space and constrictions are a concern.<br>• Designed for conveying free & non free flowing bulk materials. | • Available in diameters from 100 to 300mm.<br>• Lengths from 5 to 21 Metres.<br>• Ideal when loading grain silos, preparing a cattle ration or storing fertiliser. | • Available in diameters from 100 to 300mm.<br>• Lengths from 5 to 21 metres.<br>• Loads and unloads all types of silos.<br>• Plenty of extras available for this auger. | • Four different diameters available; 150, 200, 250 & 300mm.<br>• Lengths from 3 to 30 meters.<br>• Designed for usage on the horizontal. |

ENGINEERING
WAKELY
COMPANY

## GRAIN CLEANER

**Specifications:**

- Max outputs of 5 Models range from 12 to 60 tonnes per hour.
- Single and Three phase versions available.
- Degree of cleaning is fully adjustable.
- Five Model sizes available. CE

LIGHT TRASH

HEAVY TRASH

CLEAN GRAIN

# WAKELY GRAIN CLEANER CE

Grain cleaning prior to processing maximises feed quality, eliminates dust and prepares the grain for processing. The first section uses a sieve to remove heavy trash, while an aspirator removes the light trash. This two stage cleaner can be used to clean and grade all types of grain.